


CondensStop[®]

Datasheet CondensStop[®] CS S25122

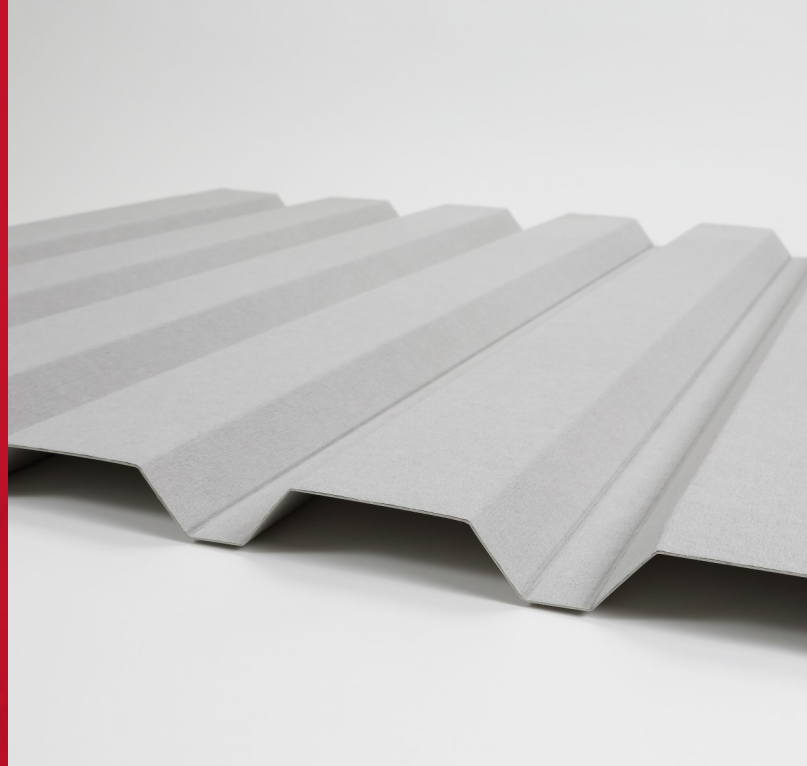

CondensStop[®] CS | S25122

- Anti-condensation liner, self-adhesive
- Microsphere technology
- Impervious to mould growth

Applications

- Metal roofing panels & profiles
- Cargo train & truck tarpaulins

Composition

Fiber	Polyester
Binder	Acrylate / PAN - PMMA - Microspheres
Finish	Hotmelt adhesive, HDPE release foil, standard grey
Packaging	Roll, wrapped in PE stretch foil and/or cardboard boxed, on wooden pallet

Technical data

Property	Unit	Value	Conditions
Condensation absorption at 0° roof pitch	g/m ²	1037	NF P 15-203-1 100%RH, ΔT:17°C
Condensation absorption at 10° roof pitch		716	
Condensation absorption at 30° roof pitch		538	
Condensation absorption at 45° roof pitch		394	
Weight (excl. release foil)	g/m ²	90	ISO 9073-1
Thickness (incl. release foil)	mm	1.6	ISO 9073-1
Reaction to fire	Class	B-s1, d0	EN 13501-1
Flame retardancy	Class	I	ASTM 84-04
Fungal resistance: <i>impervious to mould growth</i>	Class	I	TNO Bouw
Tensile strength, machine direction	N/5 cm	90	ISO 9073-3
Tensile strength, cross direction	N/5 cm	15	ISO 9073-3
Core pipe diameter	mm	76	

v201609

Please observe the General Handling Guidelines before application

The information contained in this document has been compiled in good faith by Lantor BV, but nevertheless no representation or warranty is given as to the accuracy or completeness of the (technical) information provided herein. Lantor BV can not be held liable of any damages arising from any (printing) errors or omissions in this information. Lantor BV reserves the right to make changes with respect to the information provided at any time without further notice.

PO Box 45 - 3900 AA
Verlaat 22 - 3901 RG
Veenendaal
The Netherlands

 **LANTOR**
enabling performance
www.lantor.com